



# Acer Iconia A1-830 Battery Replacement

How to get the battery and safely remove and replace it.

Written By: Matt Champagne



## INTRODUCTION

Replacing the battery solves charging issues caused by a corrupt or dead battery. Tablets typically use lithium ion type batteries, which are dangerous if punctured, so be careful when handling the battery itself.

---



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
-



## Step 1 — Back Panel



- Prepare your working space. The ideal work space has a flat, level surface that is clean and well lit.
- Shut down your Acer Iconia A1-830.
- Remove any cables or exterior covers from your tablet.
- Place it on your work space, with the screen facing up.




## Step 2

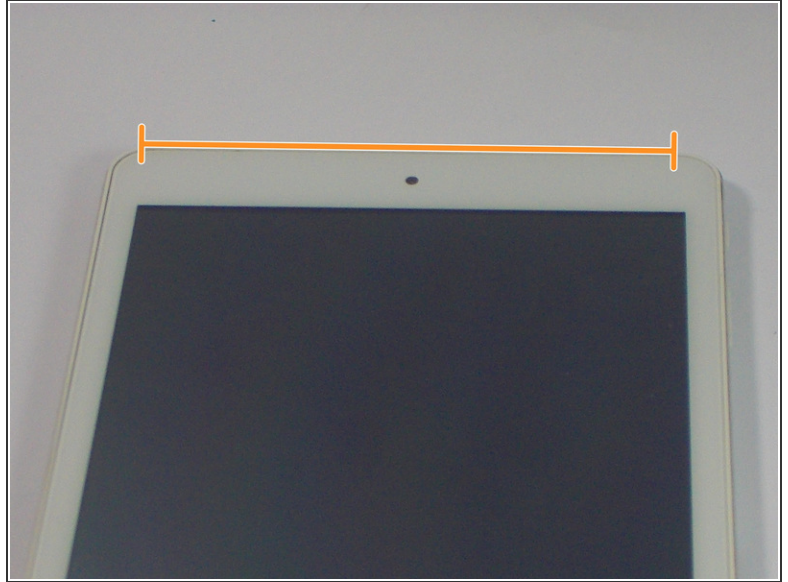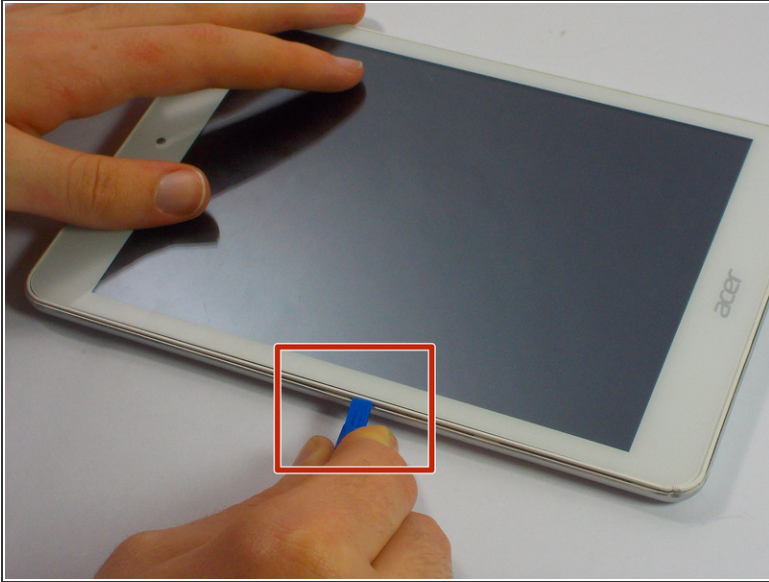

- Wedge the plastic opening tool into the tiny gap between the white plastic front bezel and the aluminum rear panel.
- Do not try to pry apart the top edge on the front side near the front-facing camera.


## Step 3 — Battery

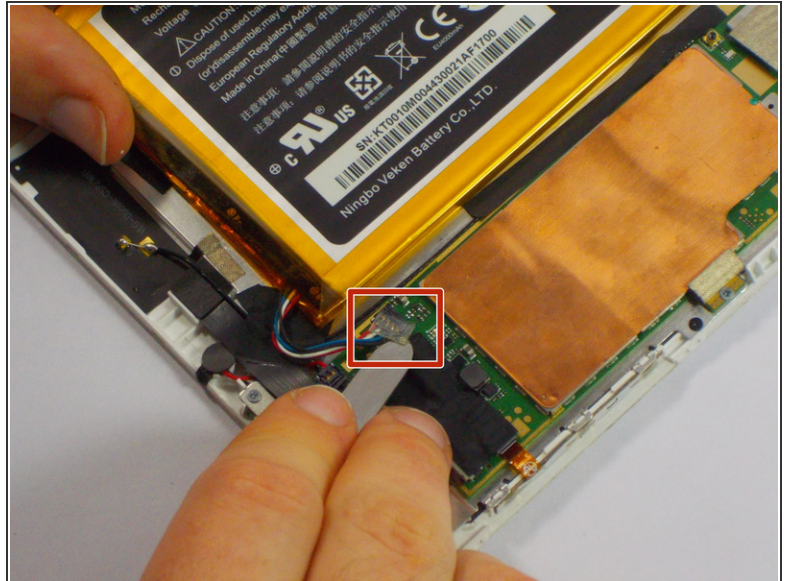

- Remove the small clear plastic cover on top of the battery cable with the nylon or metal spudger.





## Step 4

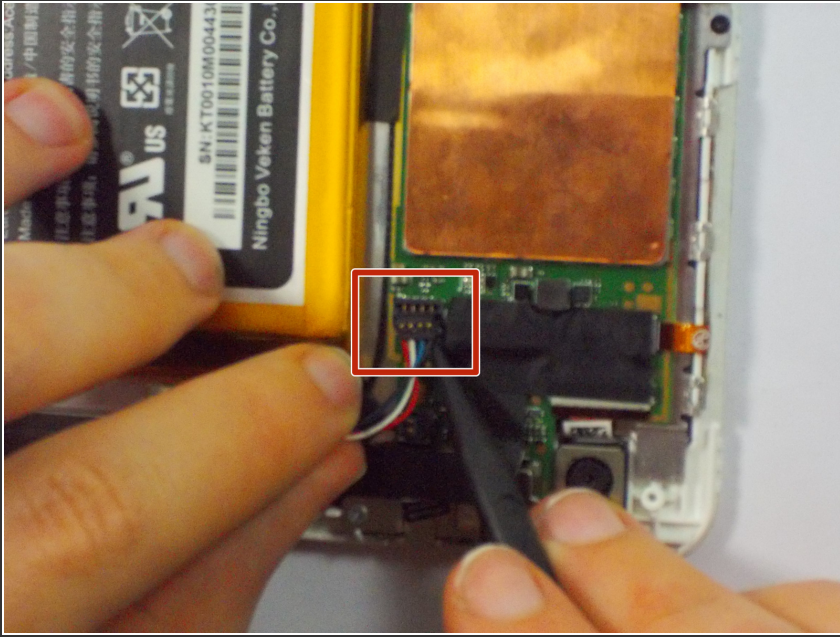

- Remove the battery cable by lifting it up with the pointy end of the black nylon spudger.

## Step 5

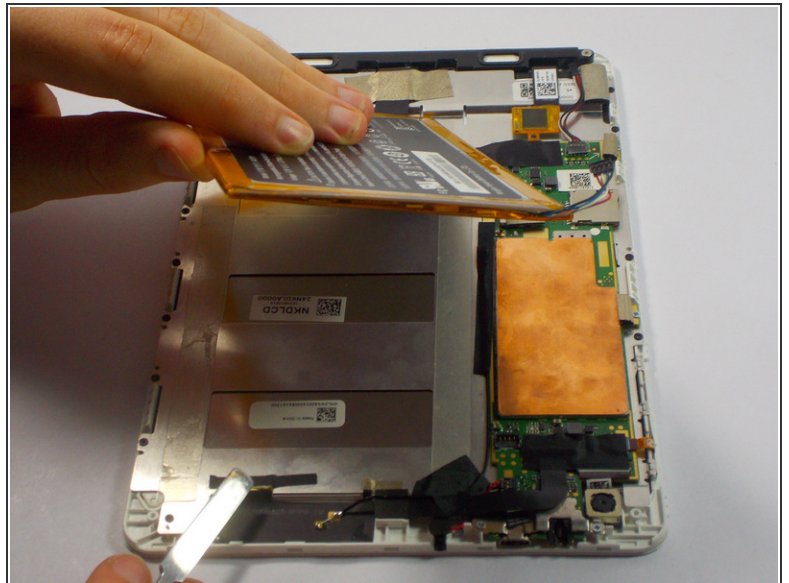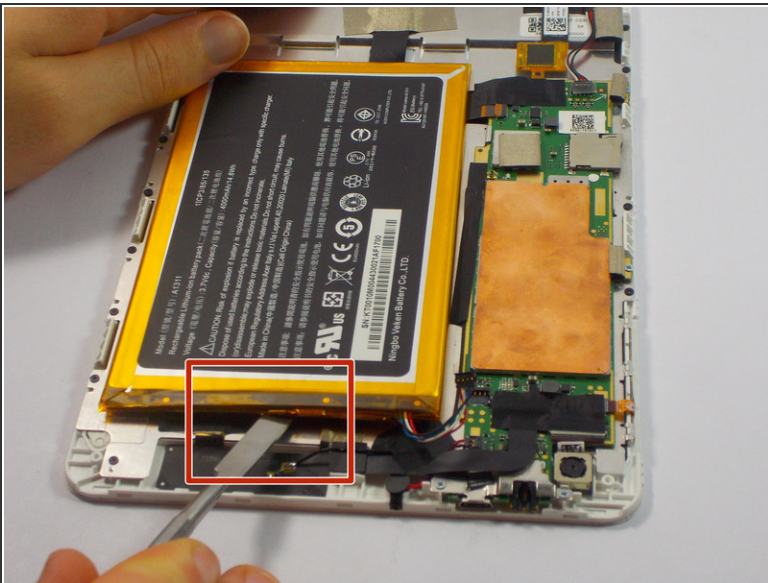

- Un-stick the battery from the metal plate using the black nylon spudger.

⚠ Be careful not to puncture the battery while removing it.

To reassemble your device, follow these instructions in reverse order.

